


The MaxMech150™ panel uses a mechanical seam standing system with a sleek, low profile look. Featuring 16" coverage and 1.5" rib height, it uses concealed fasteners and double-lock seams to allow thermal movement, reducing structural stress and ensuring long-term performance. MaxMech150™ is made from Galvalume® coated steel in 26 or 24 gauge and finished with Sherwin-Williams WeatherXL™ or PVDF™. Its precision-engineered design offers superior weather resistance to withstand wind and snow loads, making it a durable solution for commercial, industrial, and high-end projects requiring strength, aesthetics and energy efficiency.

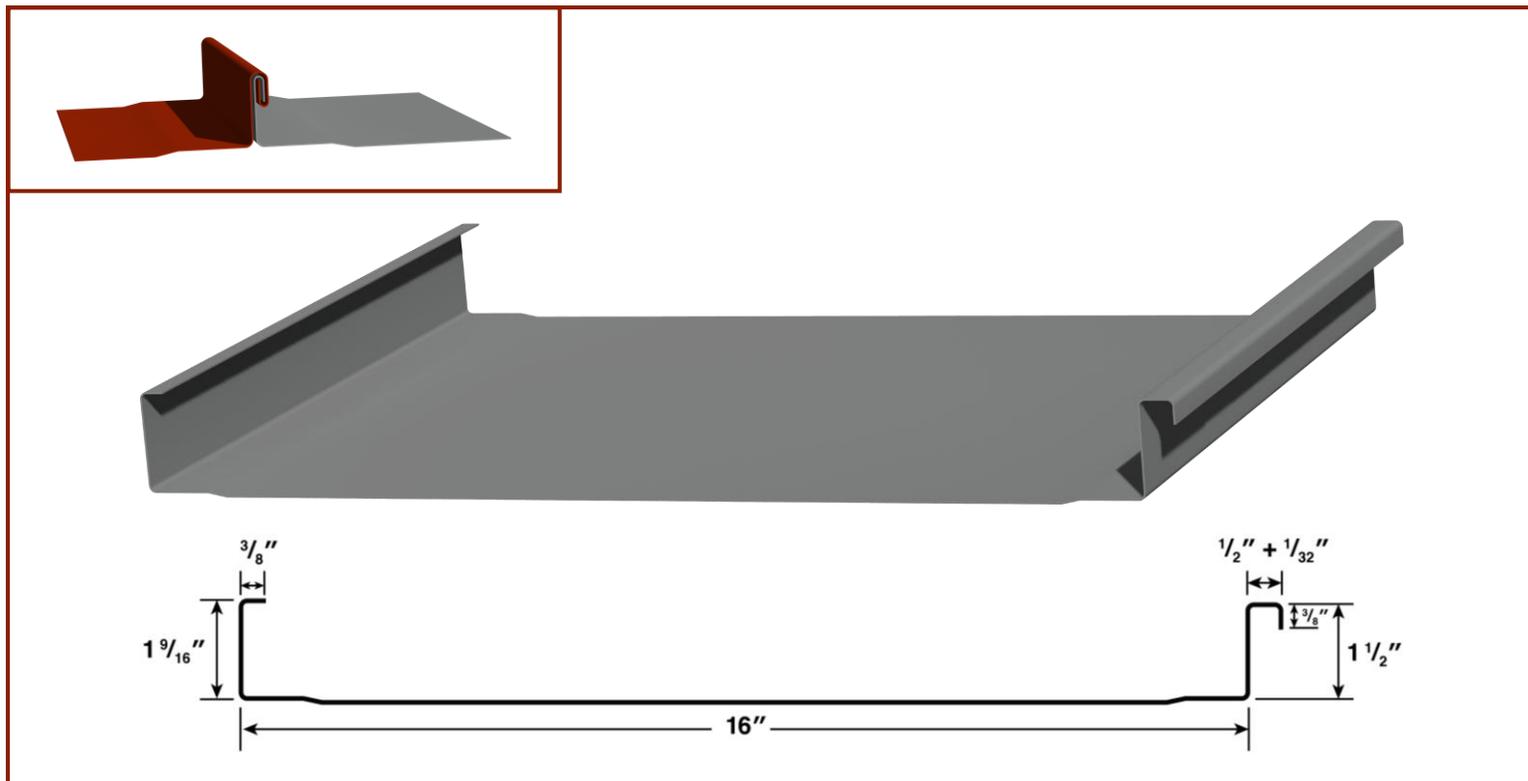

## DETAILS & CERTIFICATIONS

- Coverage Width = 16"
- Major Rib Height = 1 1/2"
- Minimum Slope = 1:12
- Material = Galvalume® Coated Steel / Aluminum
- Available Gauges = 24, 22 / .032", .040"
- Installation Substrates = Solid Substrate
- Fasteners = Concealed Fastener Clip
- Color / Finish = AC Galvalume, PVDF™
- Mechanically Seamed Ribs
- Unlimited Thermal Movement
- On-site Fabrication Available
- Can Be Curved
- Florida Building Code Approvals
- Weathertight Warranty

## PANEL SURFACE PROFILES



**FLAT PAN**



**PENCIL RIB**



**STRIATIONS**



**MINOR RIB**