


The MaxPanel™ is our most universal and budget-friendly exposed fastener panel, ideal for residential, agricultural, post-frame, and light commercial projects. With 36" coverage, 3/4" rib height, and ribs spaced 9" apart, it offers a clean, traditional look with dependable performance, including a built-in siphoning channel to prevent water damage. Available in 26 or 29 gauge Galvalume® coated steel, MaxPanel™ installs easily over open framing or solid substrates. Its screw-down design makes it a practical solution for a wide range of building types. Finished with Sherwin-Williams WeatherXL™, it's available in a broad selection of colors to complement any structure.



DETAILS & CERTIFICATIONS

- Coverage Width = 36"
- Minimum Slope = 3:12
- Major Rib Width = 9" On Center
- Major Rib Height = 3/4"
- Available Gauges = 29, 26
- Material = Galvalume® Coated Steel
- Installation Substrates = Open Framing or Solid Substrate
- Fasteners = Exposed
- Color / Finish = Sherwin Williams Weather XL
- Florida Building Code Product Approvals
- Texas Department of Insurance Product Approvals

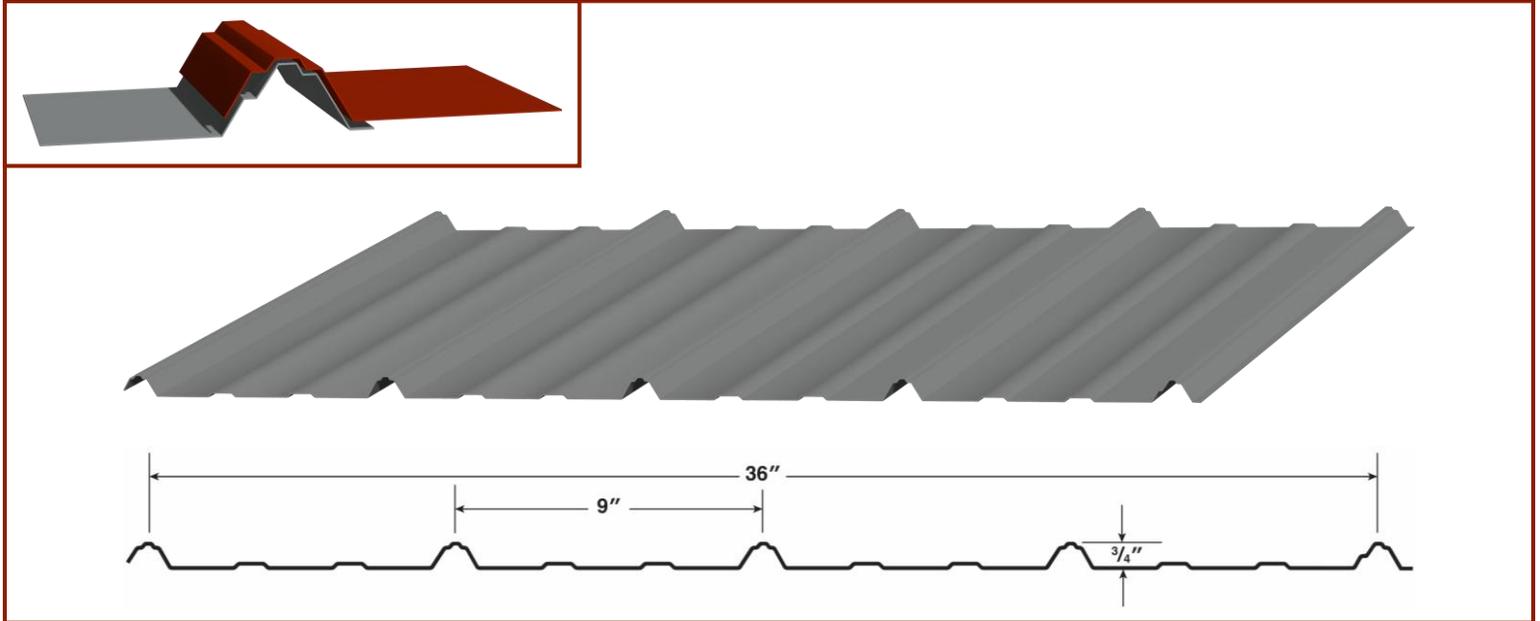