


The MaxSeam175™ panel offers a premium standing seam solution with a bold architectural profile. With 14" or 18" coverage and an impressive 1¾" rib height, it delivers a high-end appearance while maintaining superior weather-tightness. Installed over solid substrates using a hidden clip system, MaxSeam175™ allows for thermal expansion and contraction, making it ideal for climates with extreme temperature shifts. Crafted from Galvalume® coated steel in 26 or 24 gauge and finished with Sherwin-Williams WeatherXL™ or PVDF™, this panel is perfect for upscale residential, commercial, or institutional projects where performance and style matter.



## DETAILS & CERTIFICATIONS

- Coverage Width = 14", 18"
- Major Rib Height = \*1¾"
- Minimum Slope = 2:12
- Material = Galvalume® Coated Steel / Aluminum
- Available Gauges = 26, 24, 22 / .032", .040"
- Installation Substrates = Solid Substrate
- Fasteners = Concealed Fastener Clip
- Color / Finish = AC Galvalume, Weather XL, PVDF™
- Snap-together Ribs
- Unlimited Thermal Movement
- On-site Fabrication Available
- Florida Building Code Product Approvals
- Texas Department of Insurance Product Approvals
- Weathertight warranty

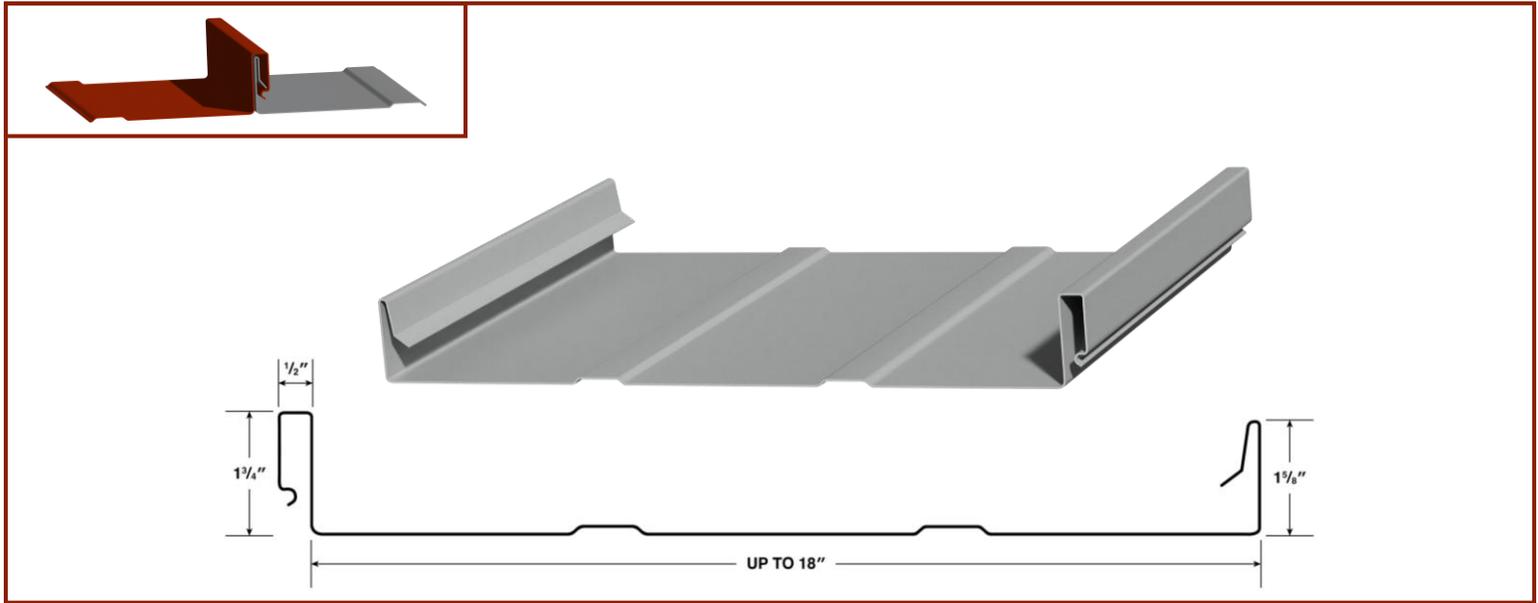

## PANEL SURFACE PROFILES



**FLAT PAN**



**PENCIL RIB**



**STRIATIONS**



**MINOR RIB**