


The MaxStrong™ Panel is a durable exposed fastener option designed for both roofing and wall applications. With 36" coverage and a 5/8" rib height, it delivers a clean, traditional profile with reliable performance. Engineered for installation over solid substrates or open framing, MaxStrong™ is available in 26 or 29 gauge Galvalume® coated steel and supports slopes as low as 3:12. Its design minimizes thermal movement, making it a practical solution for residential, agricultural, and light commercial projects. Finished with Sherwin-Williams WeatherXL™, it comes in a wide range of colors to complement any structure.

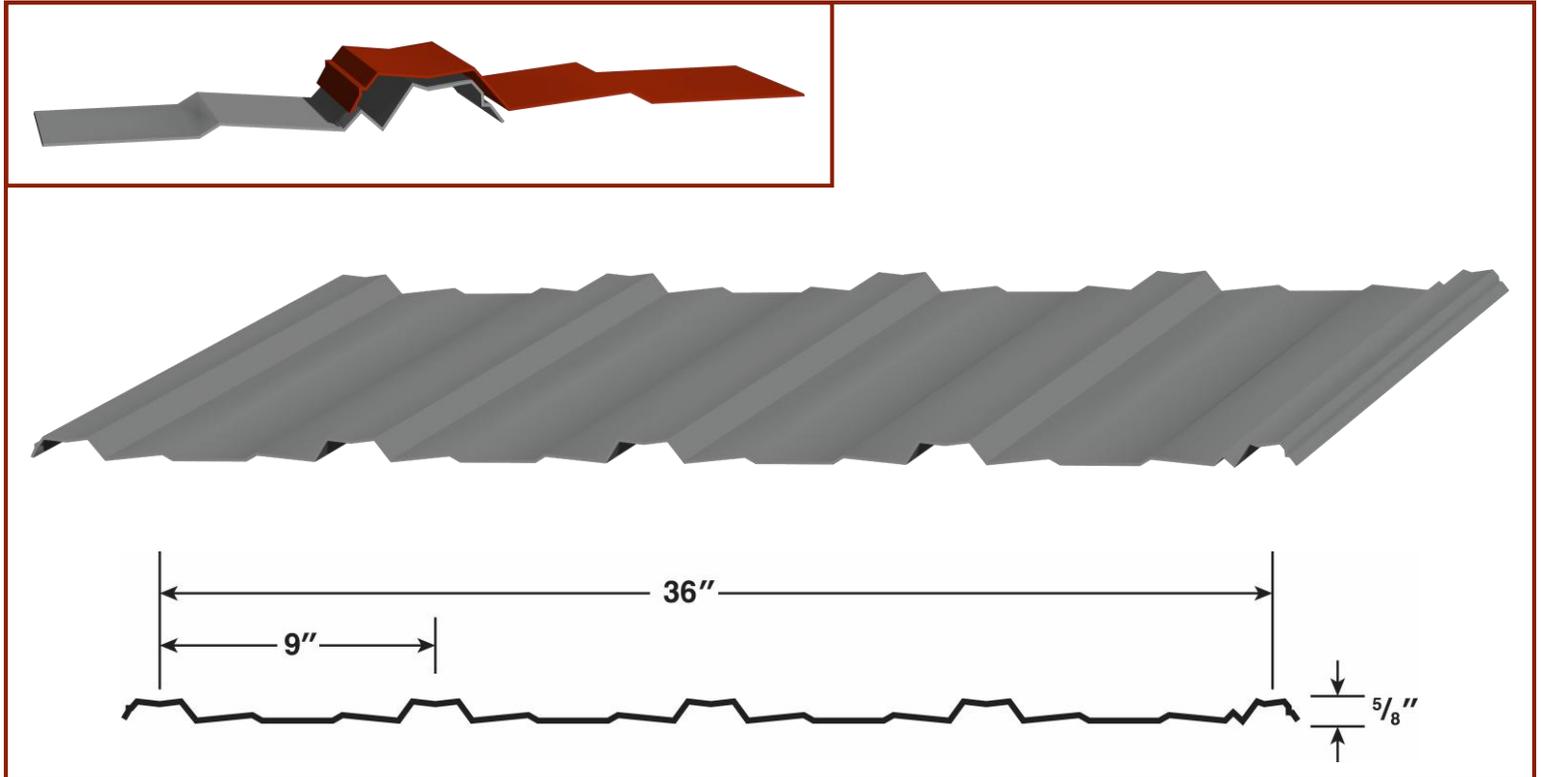

## DETAILS

- Coverage Width = 36"
- Rib Height = 5/8"
- Minimum Slope = 3:12
- Available Gauges = 29, 26
- Material = AZ55 Galvalume, AZ50 painted, G90 Galvanized
- Installation Substrates = Solid Substrate or Open Framing
- Fasteners = Exposed
- Color / Finish = Sherwin Williams Weather XL
- Limited Thermal Movement